



WACKER **POLYMERS**

PERFORMANCE REQUIREMENTS AND STANDARDS FOR A SUCCESSFUL EXTERIOR INSULATION AND FINISH SYSTEMS (EIFS)

ABBAS KANISAN, LBE, 10TH OCTOBER, 2012

CREATING TOMORROW'S SOLUTIONS

- **WACKER** is a Registered Provider with **The American Institute of Architects Continuing Education Systems (AIA/CES)**. Credit(s) earned on completion of this program will be reported to **AIA/CES** for AIA members. Certificates of Completion for both AIA members and non-AIA members are available upon request.


This program is registered with **AIA/CES** for continuing professional education. As such, it does not include content that may be deemed or construed to be an approval or endorsement by the AIA of any material of construction or any method or manner of handling, using, distributing, or dealing in any material or product.

- Questions related to specific materials, methods, and services will be addressed at the conclusion of this presentation.
- Learning Objective: Illustrating the advantages of using the External Insulation Finishing system on modern architecture and saving energy.

AGENDA


- THE EIFS / ETICS SYSTEM
- WHY EIFS / ETICS?
- MOST IMPORTANT COMPONENTS
- NORMS AND REGULATIONS
- CRITICAL FACTORS
- EOTA WALL
- CASE STUDY CHINA
- COST MODEL

THE EIFS / ETICS SYSTEM

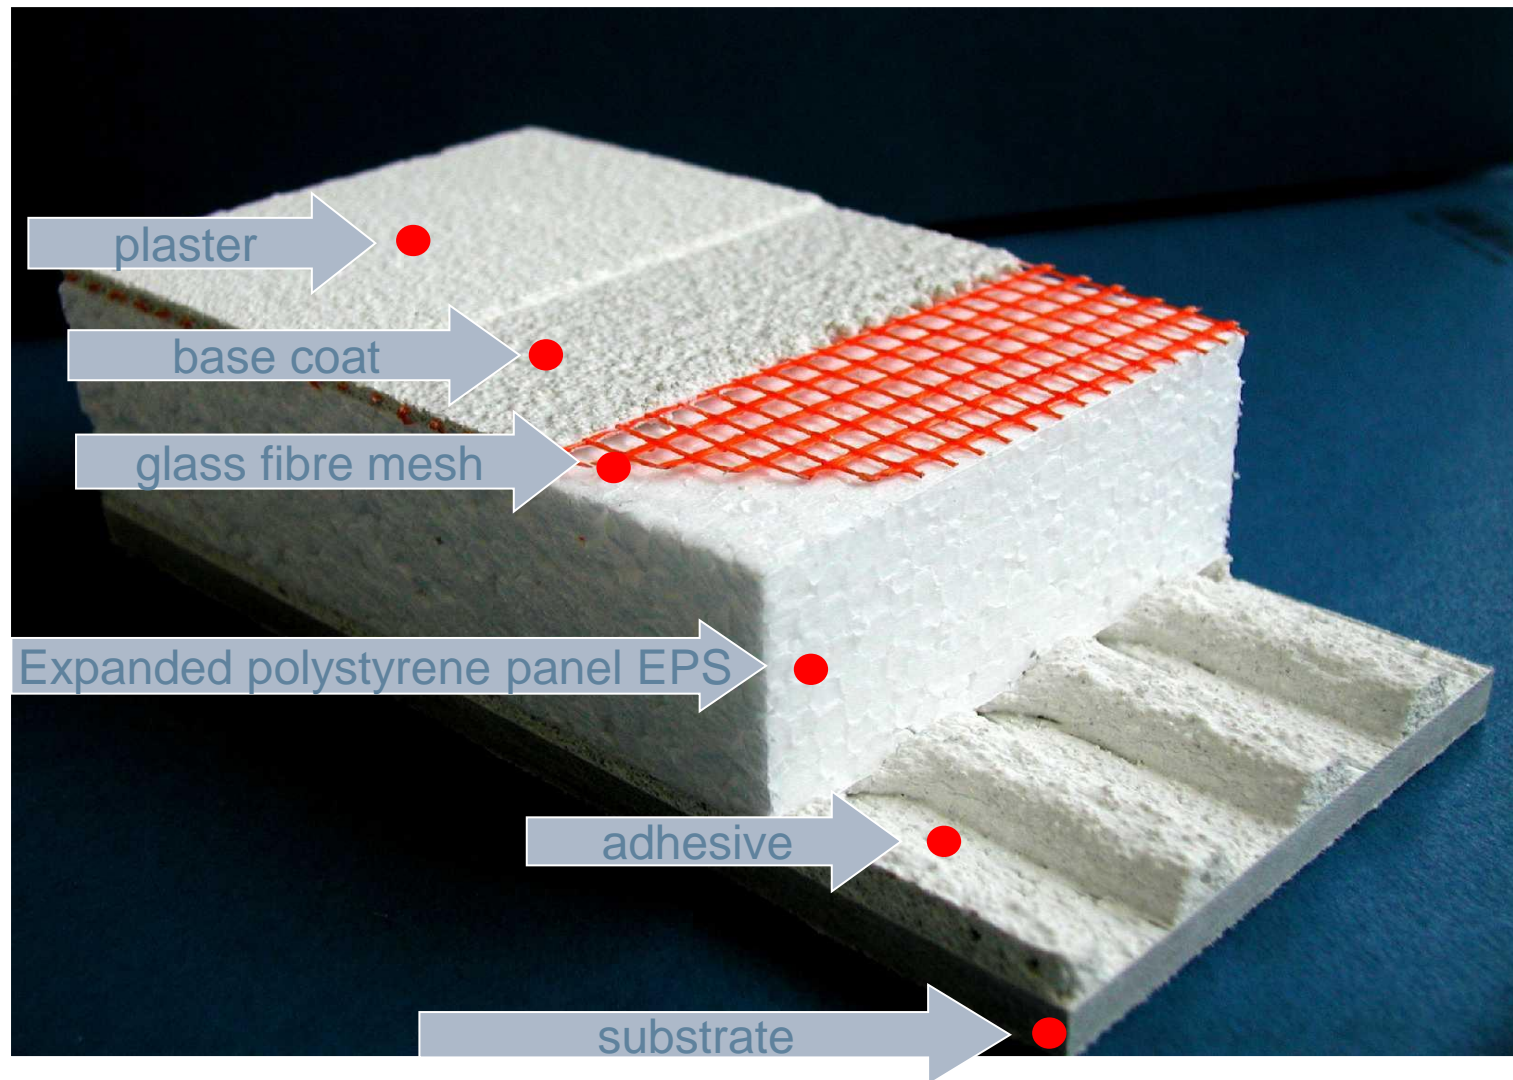

WHY EIFS / ETICS?

POSSIBILITIES FOR ENERGY SAVING: EIFS MAIN LEVER

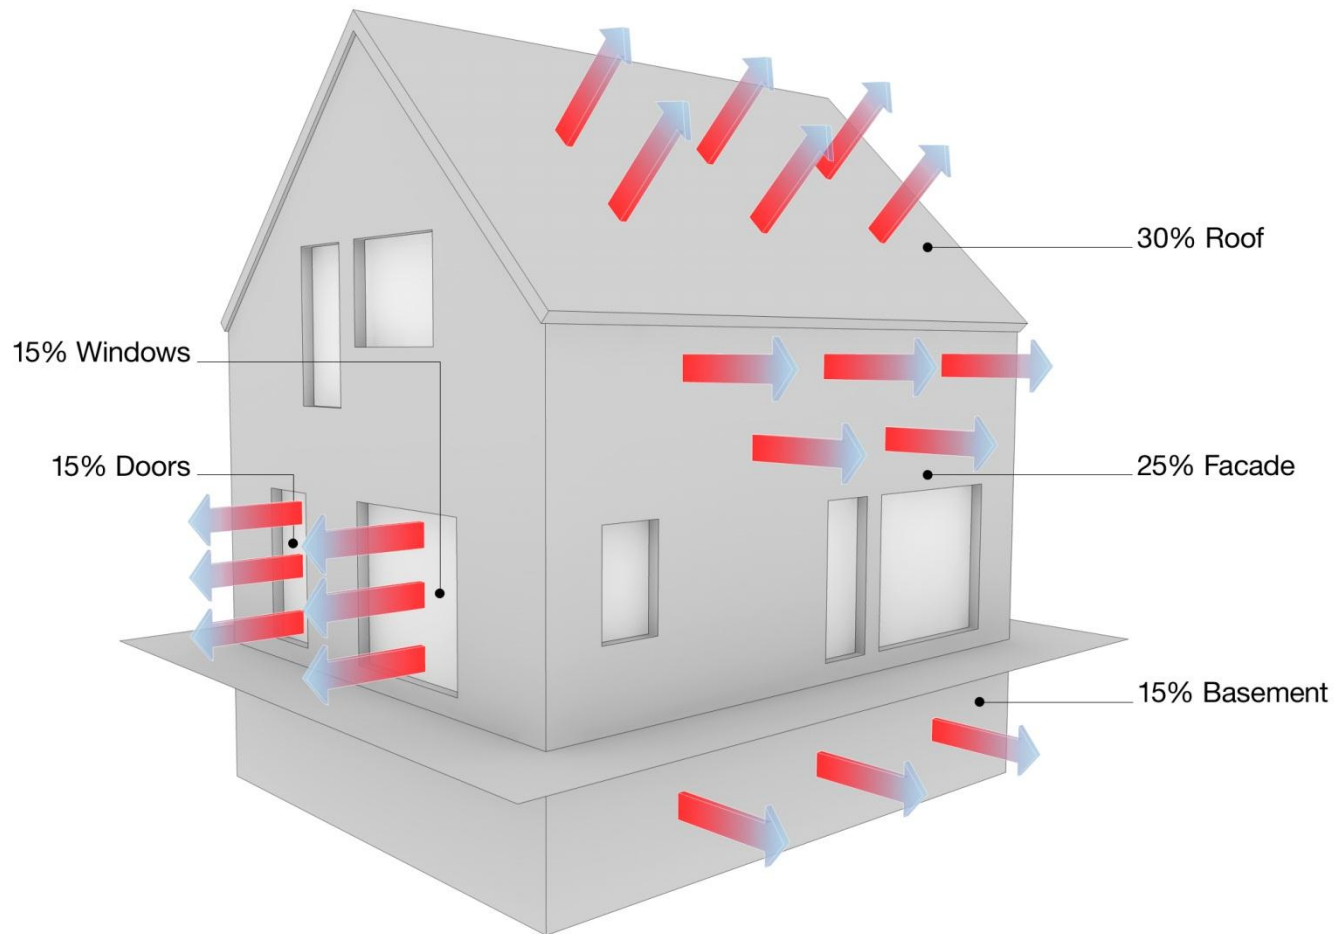

WHY EIFS?





- EIFS has proved to have a superior energy efficiency by reducing heat transmission by approx 50%
- Improved energy efficiency helps to reduce harmful emissions typically associated with energy production such as CO2 emissions and other by-products
- Design Flexibility and Decorative Finishing
- Superior EIFS energy efficiency reduces required air conditioning equipment capacity and limits the physical effects of temperature fluctuations hence reducing structural stress
- EIFS can be applied to new and existing structures.
- EIFS is the **ONLY** solution for insulating existing buildings

MOST IMPORTANT COMPONENTS REQUIREMENTS

Substrate	←	Mechanical stability
Polystyrene panel	←	Excellent insulation properties
Adhesive	←	Excellent workability, excellent adhesion, long-term reliability
Primer	←	Improved adhesion
Plaster	←	Weather resistance, versatile design features

MOST IMPORTANT COMPONENTS

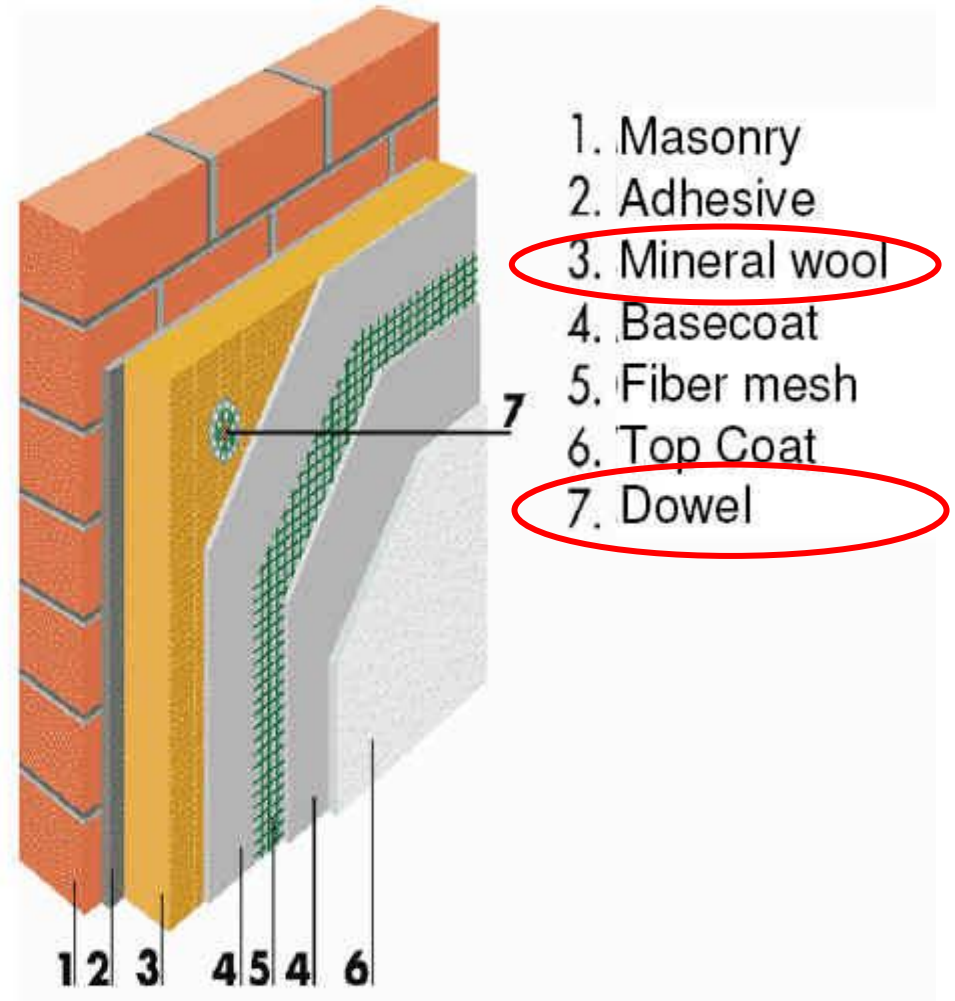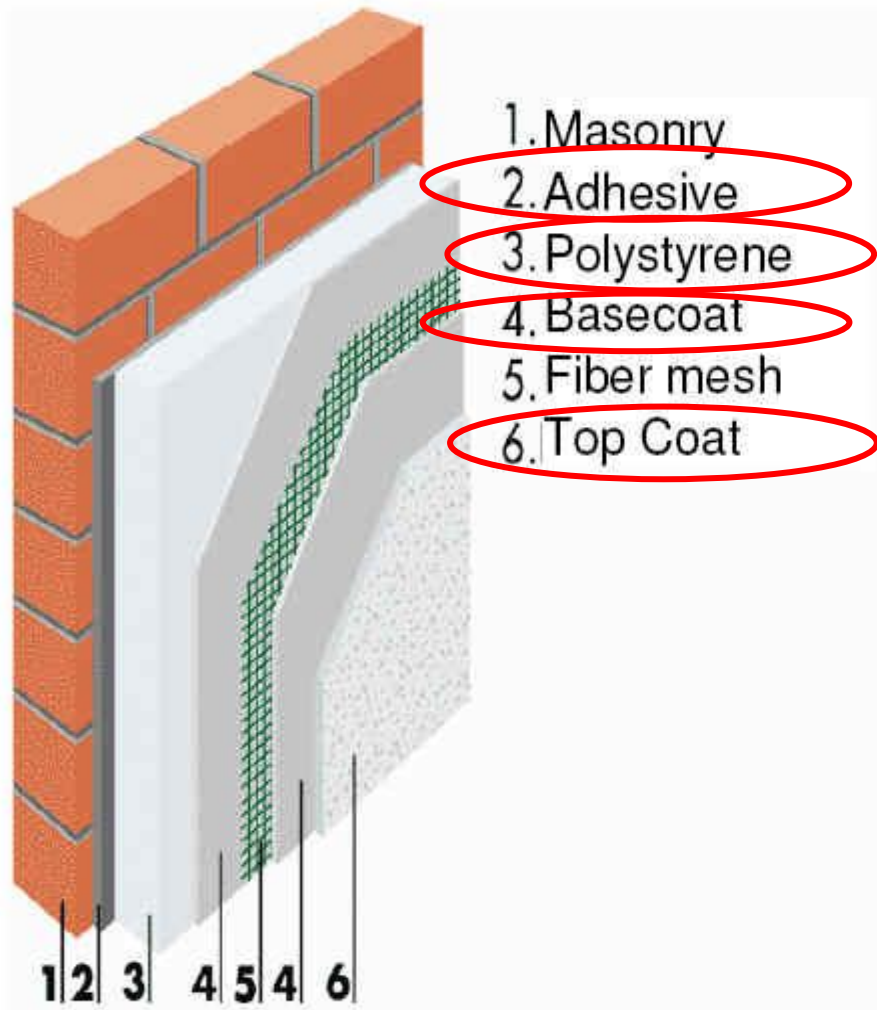

MOST IMPORTANT COMPONENTS REQUIREMENTS ON THE FRESH AND HARDENED MORTAR



Requirements for fresh mortar:


- Good workability for manual and machine application
- Long open time

Requirements for hardened mortar:

- Good adhesion to polystyrene boards and other substrates (concrete, bricks, old renders)
- High flexibility and impact strength
- Good vapor permeability
- Hydrophobic properties (water repellent)
- Good weathering resistance


MOST IMPORTANT COMPONENTS ADHESIVE AND BASECOAT MORTAR

Adhesion to polystyrene panels: storage 12 d sc + 2 d water immersion

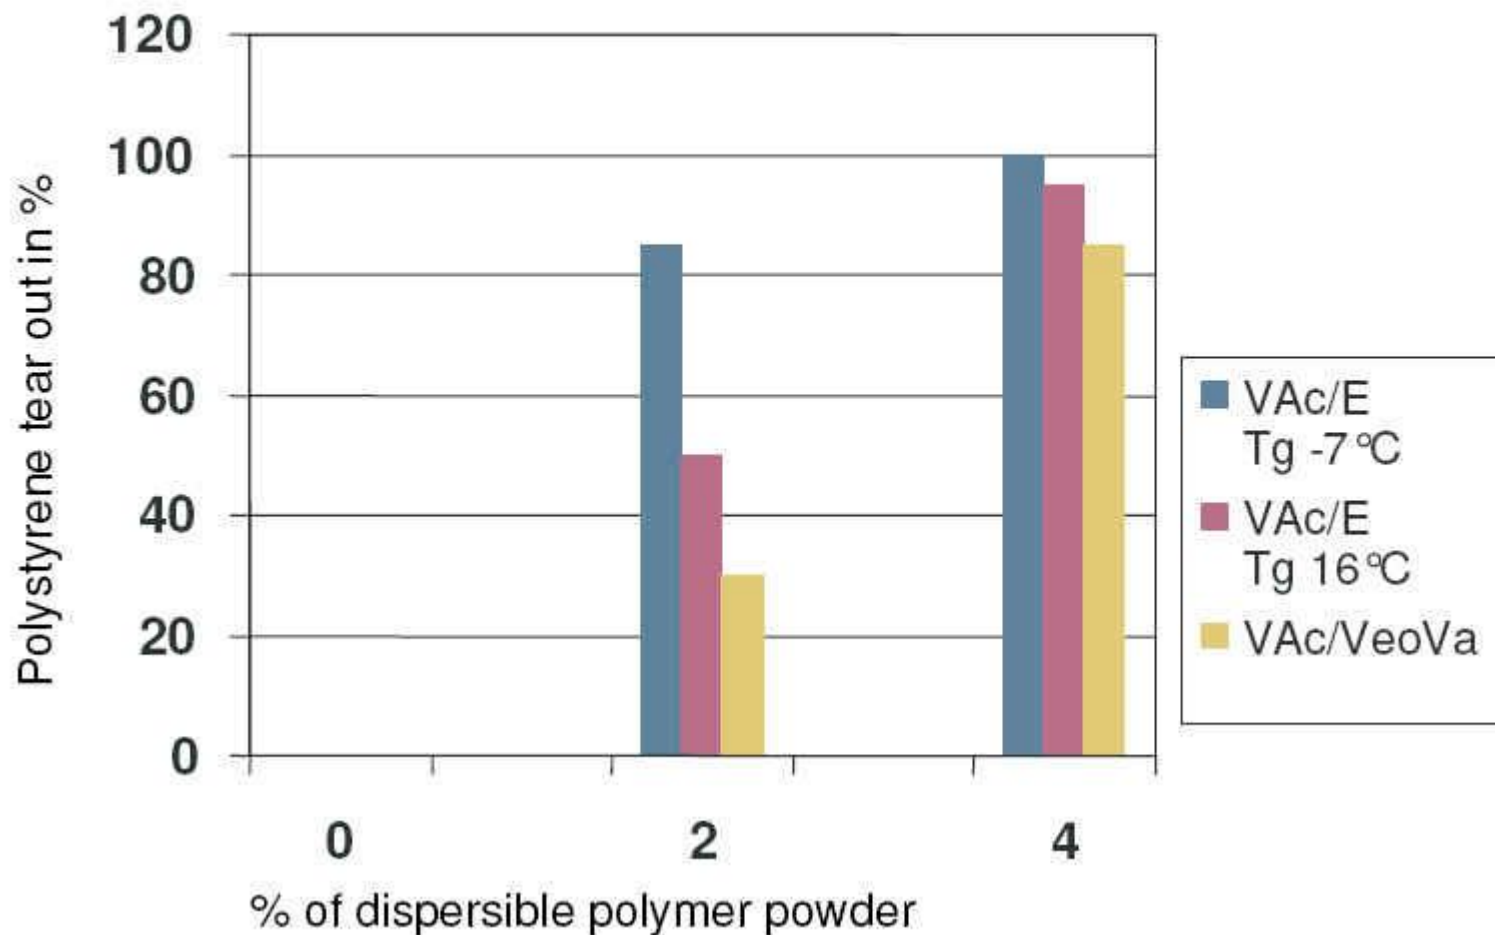


MOST IMPORTANT COMPONENTS

MEASUREMENT OF TENSILE ADHESION STRENGTH ON EPS

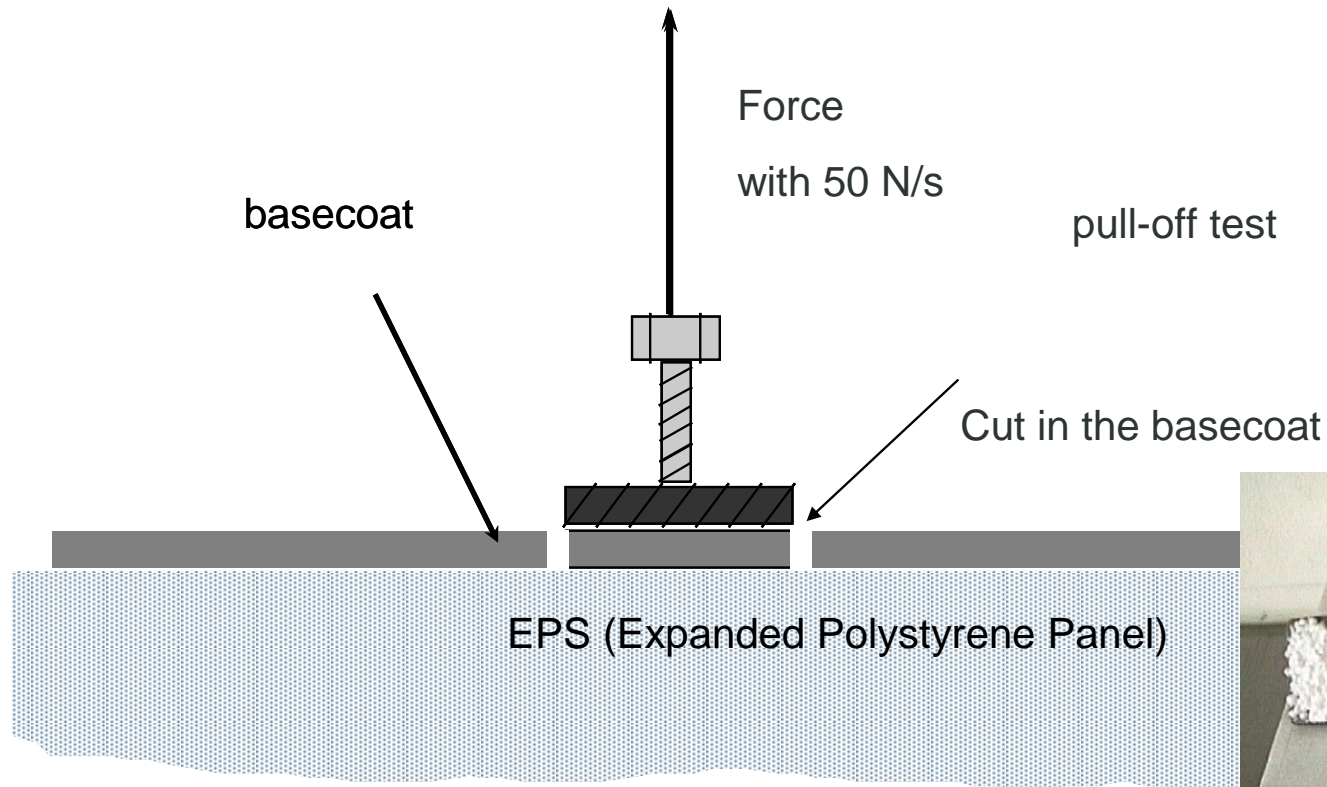

MOST IMPORTANT COMPONENTS ADHESIVE AND BASECOAT MORTAR – SEM ANALYSIS

x 50
times


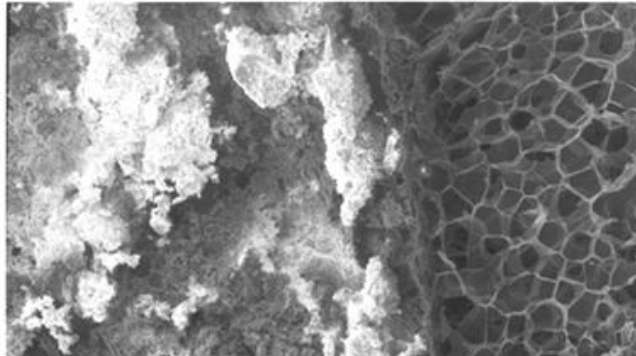


base coat


EPS

Polymer domain after
film formation


x 3000
times

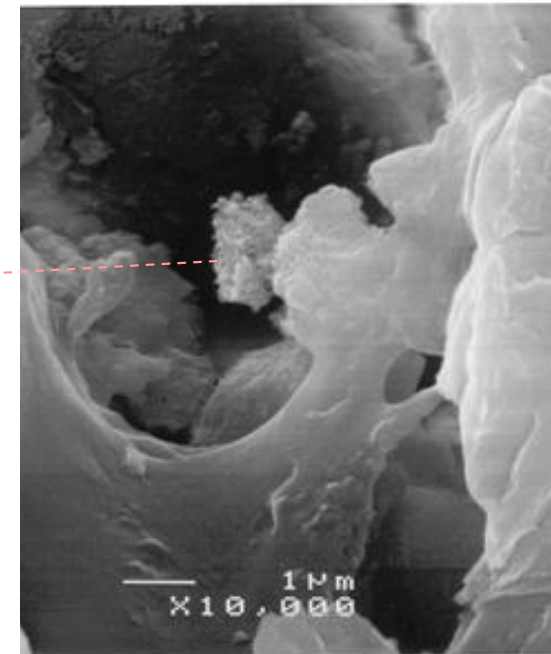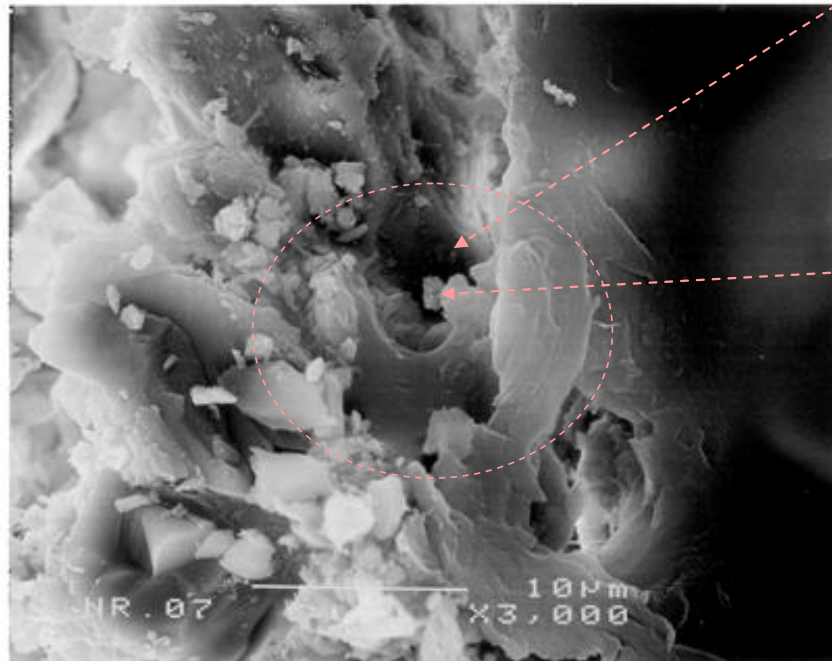

MOST IMPORTANT COMPONENTS ADHESIVE AND BASECOAT MORTAR – SEM ANALYSIS

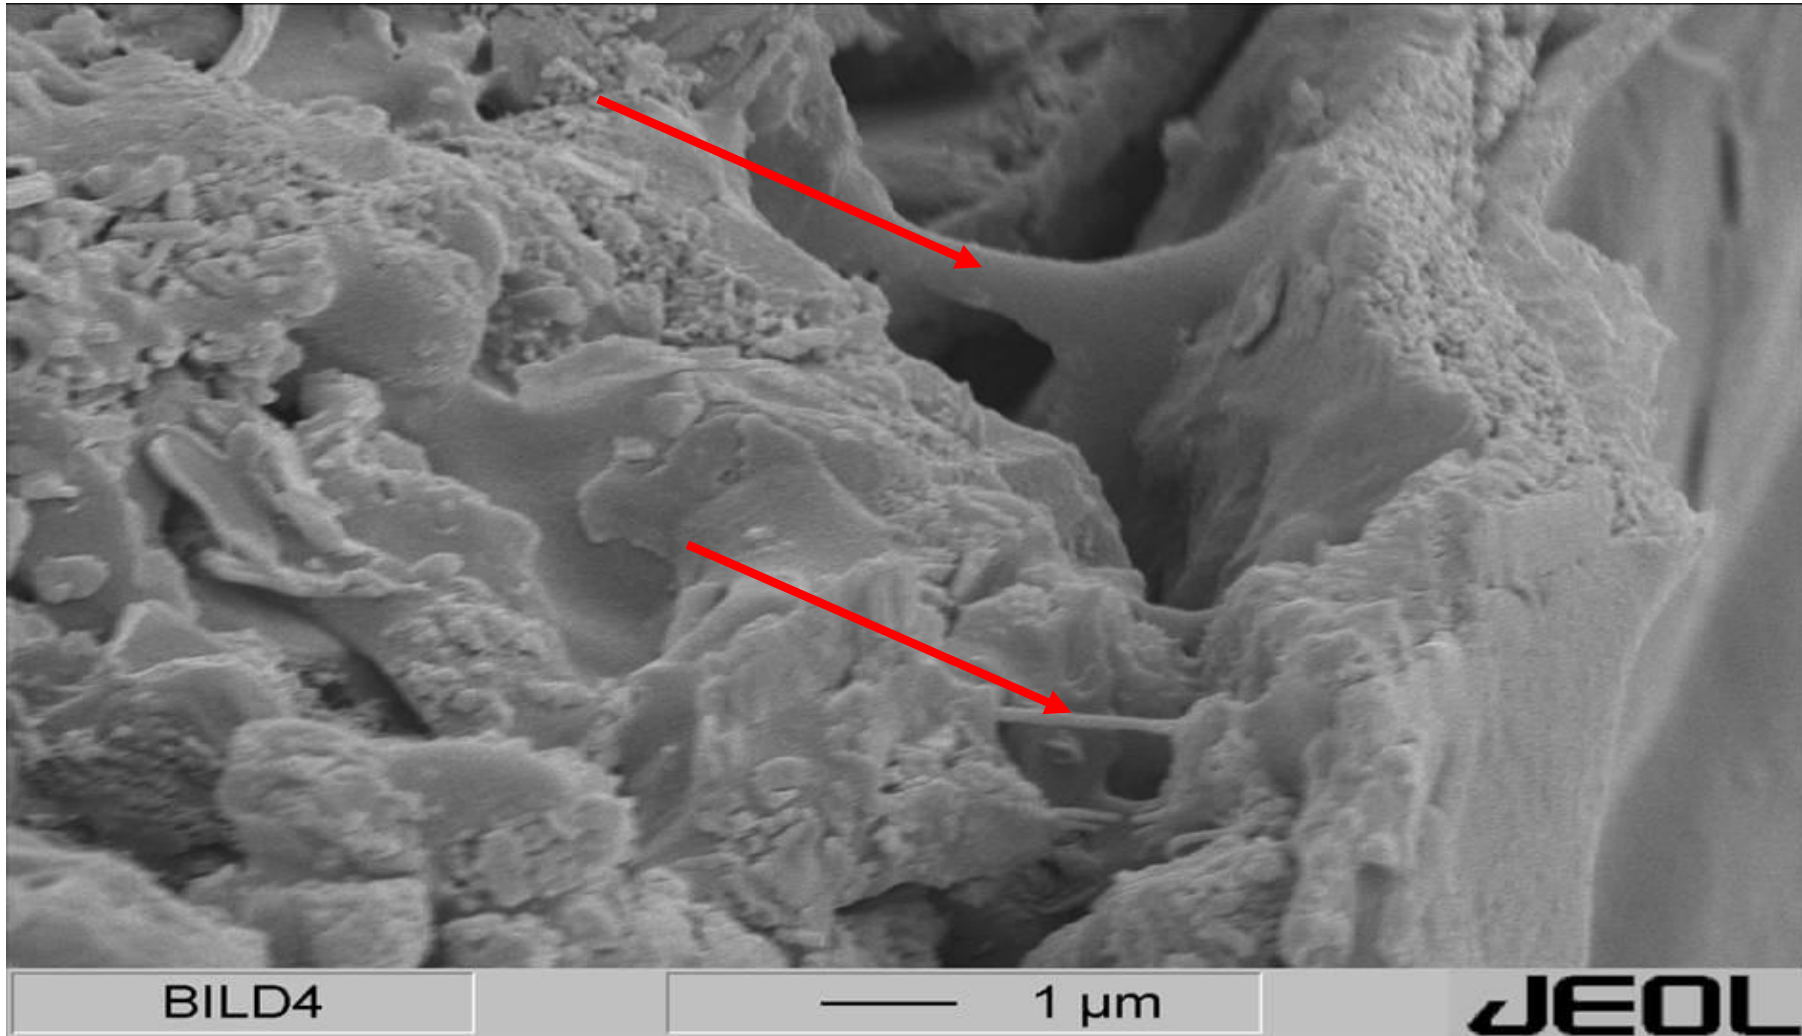

MOST IMPORTANT COMPONENT BASECOAT MORTAR IMPACT RESISTANCE

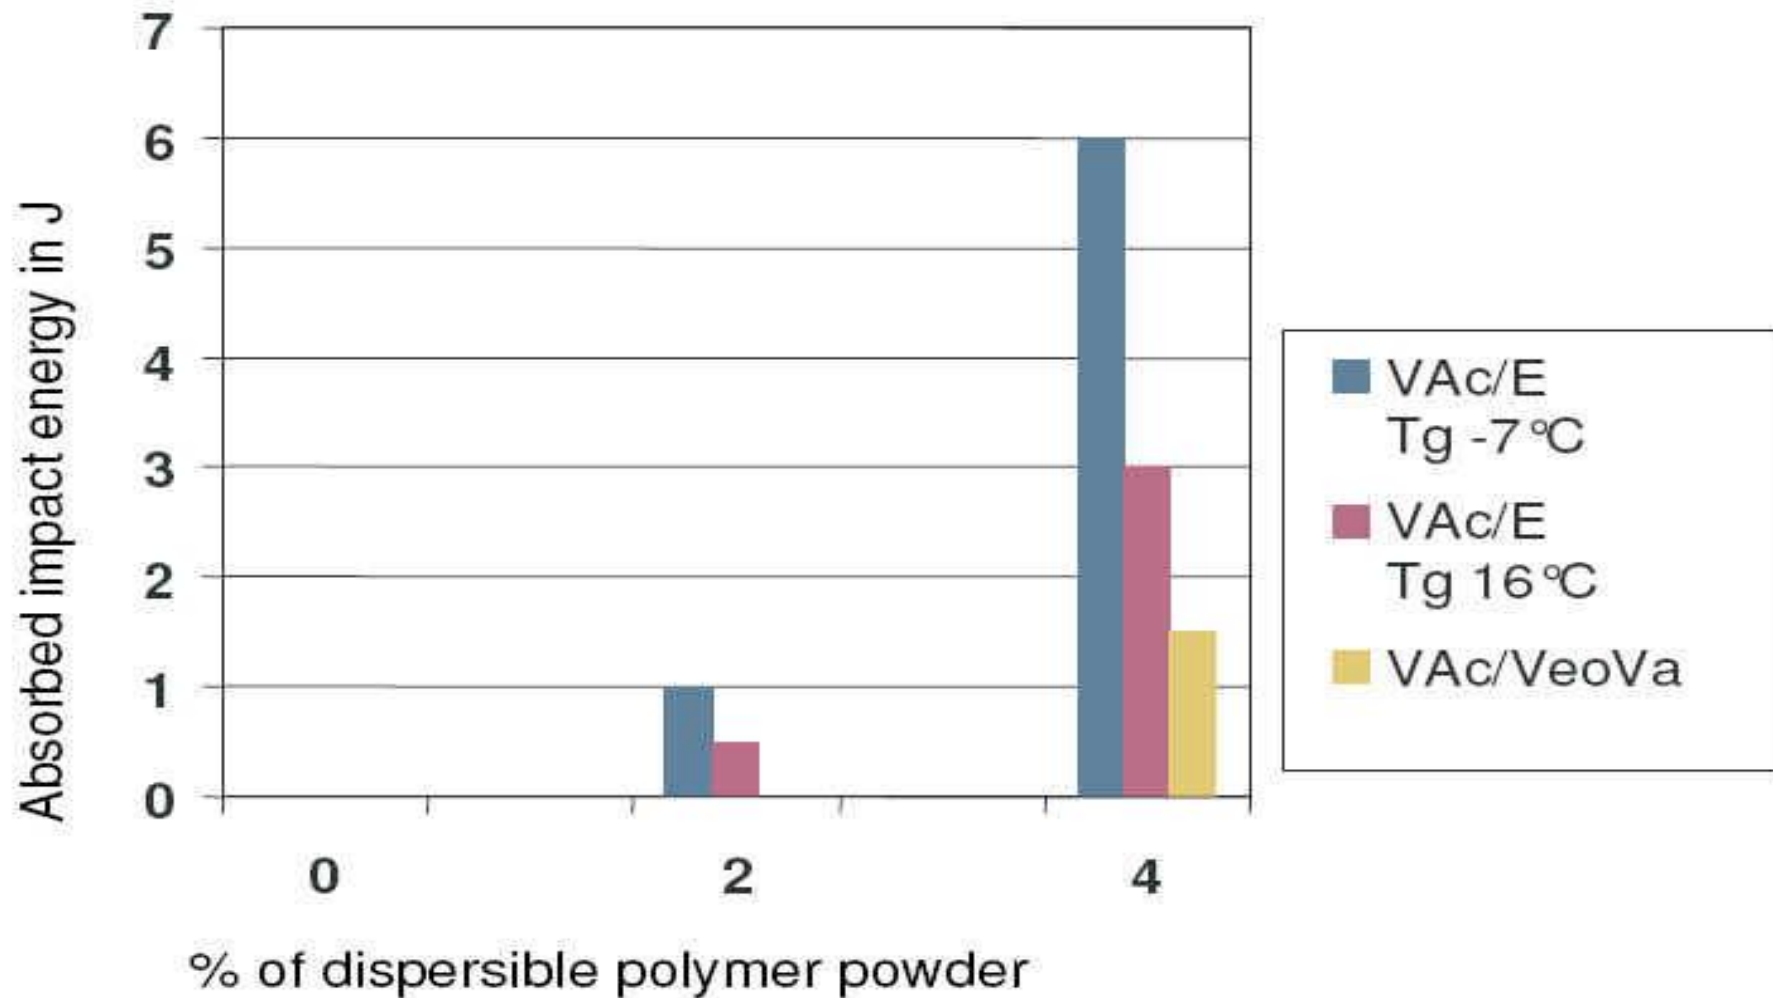

TEST AND CONVERSION JOULE IN CM OR CM IN JOULE




Tube diameter	≥55mm	≥70mm
Steel Ball diameter	50mm	64 mm
Mass	500g Steel Ball	1000g Steel Ball
real wight m [kg]	0,500	1,000
g [m/s ²]	9,80665	9,80665
	$h=J/(m*g)$	$h=J/(m*g)$
	h in cm	h in cm
0,5	10,2	5,1
1,0	20,4	10,2
1,5	30,6	15,3
2,0	40,8	20,4
2,5	51,0	25,5
3,0	61,2	30,6
3,5	71,4	35,7
4,0	81,6	40,8
4,5	91,8	45,9
5,0	102,0	51,0
5,5	112,2	56,1
6,0	122,4	61,2
6,5	132,6	66,3
7,0	142,8	71,4
7,5	153,0	76,5
8,0	163,2	81,6
8,5	173,4	86,7
9,0	183,5	91,8
9,5	193,7	96,9
10,0	203,9	102,0
10,5	214,1	107,1
11,0	224,3	112,2
11,5	234,5	117,3
12,0	244,7	122,4
12,5	254,9	127,5

weight

Min. req..

MOST IMPORTANT COMPONENT BASECOAT MORTAR IMPACT TEST WITH 500 GRAM STEEL BALL

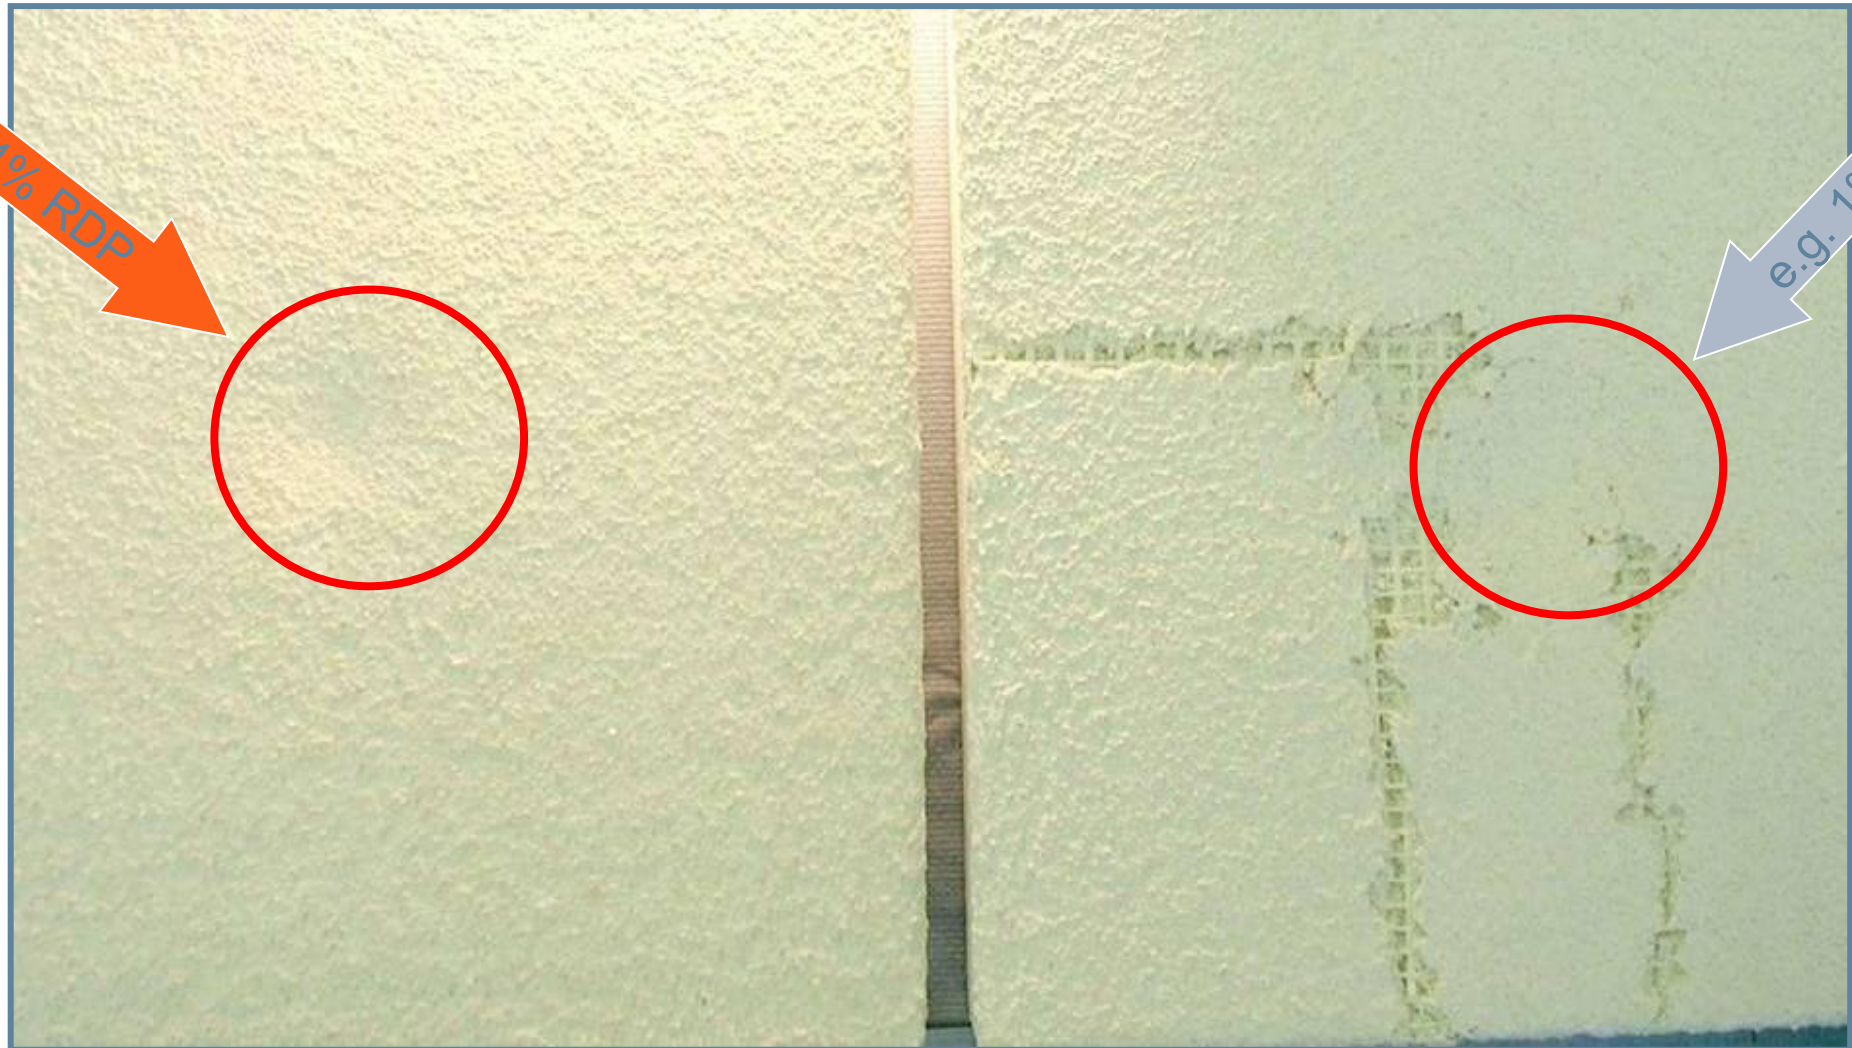

MOST IMPORTANT COMPONENTS

TOPCOAT



Topcoat:

Thin-layer plaster


- Synthetic resin-based stucco
- Silicate-based stucco
- Silicone resin-based stucco
- Cement based, polymer modified

Thick-layer plaster

- Cement based, polymer modified

MOST IMPORTANT COMPONENTS TOPCOAT CAPILLARY WATER ABSORPTION

Capillary water absorption of a cementitious plaster for EIFS according to EN ISO 15148

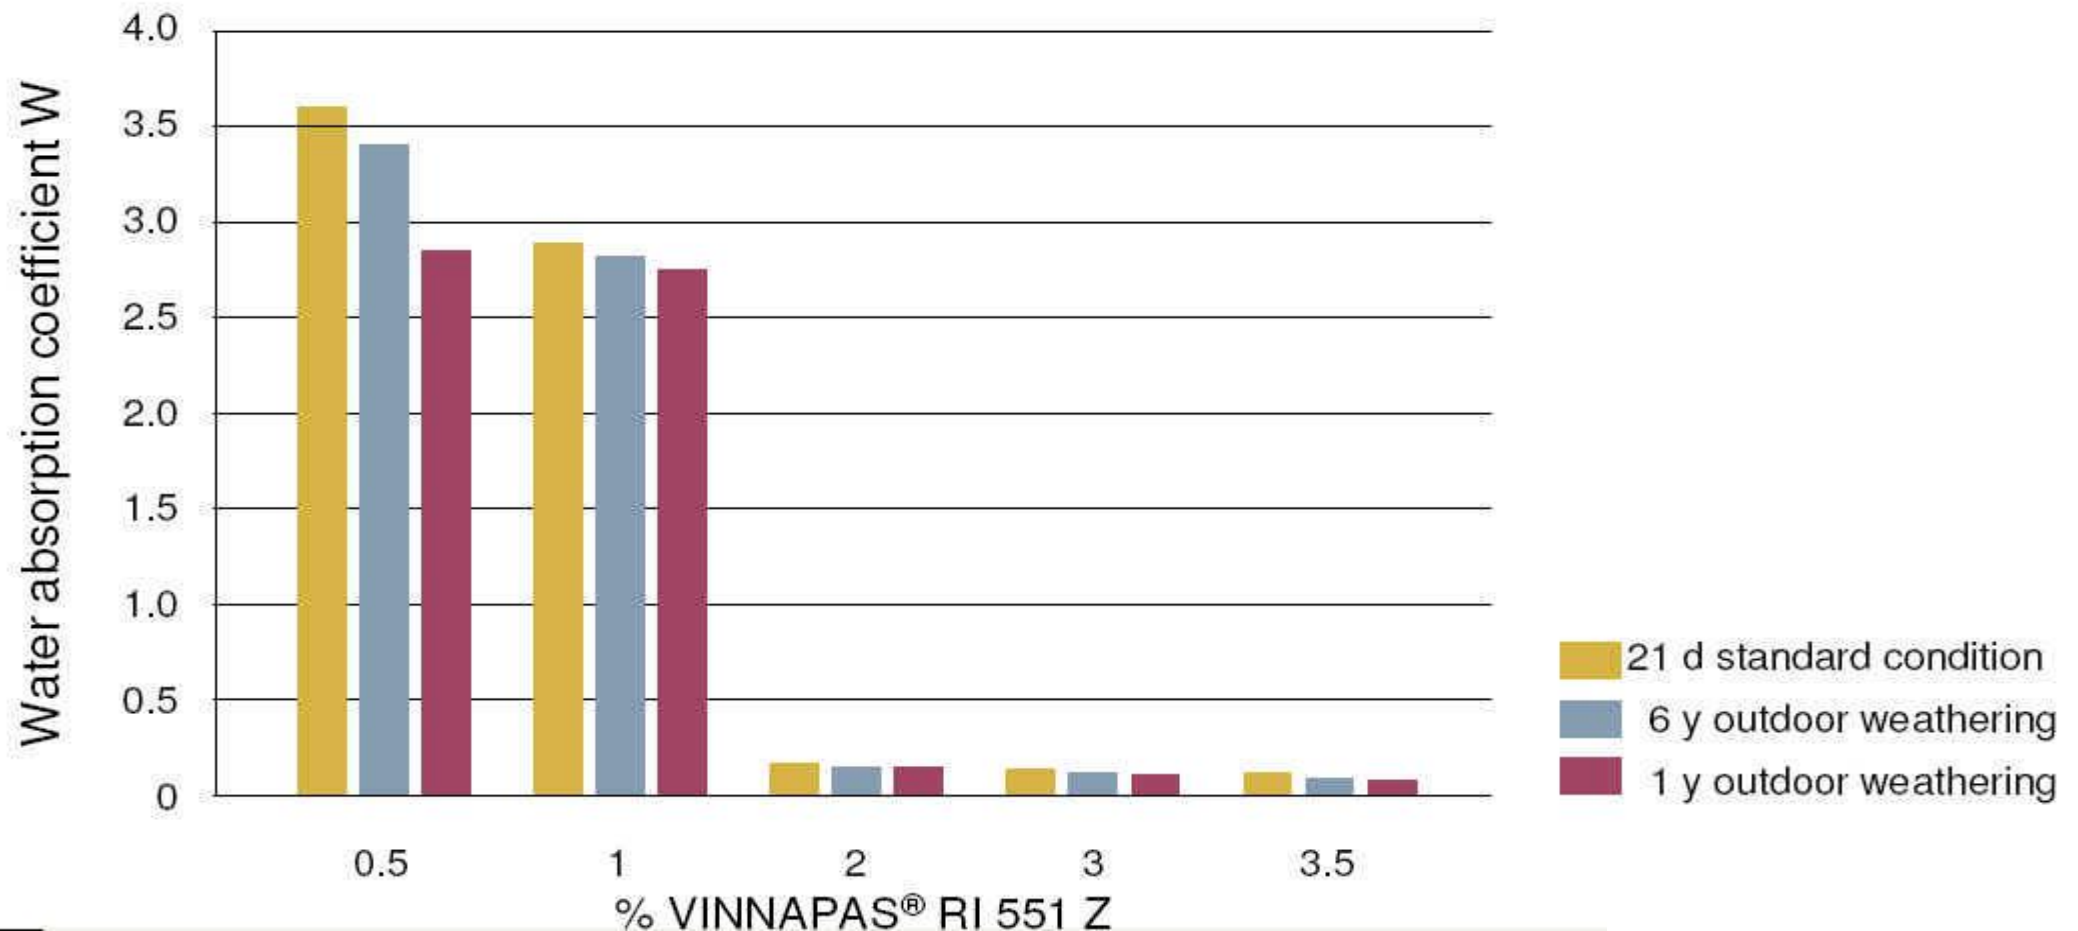

MOST IMPORTANT COMPONENTS INSULATION PANELS

Construction material	Density (kg/m ³)	Thermal conductivity (W/m °C)
Concrete	2088	1.21
Hollow brick	1380	0.73
Plaster	2000	1.20
Air gap	1.25	0.28
Polystyrene boards	24.0	0.04
Roof bricks	1400	0.95
Sand	1450	0.38
Cement tiles	2145	1.35

MOST IMPORTANT COMPONENTS

INSULATION PANELS

TECHNICAL PROPERTIES	EXPANDED POLYSTYRENE (EPS)	EXTRUDED POLYSTYRENE (XPS)	MINERALWOOL (MW)
The coefficient of heat conduction "λ"	0,033	0,028 - 0,031	0,040
The coefficient of water vapour resistance "μ"	20 - 250	8 - 250	1
Flame class	B1 or B2	B1 or B2	Flame proof
Density (Kg/m ³)	≥ 14	≥ 20	8 - 500

MOST IMPORTANT COMPONENTS FLAMMABILITY STANDARDS CLASSIFICATION AS PER EN 13501-1: May 2007

European Flammability Class	Requirement
A1 and A2	No contribution to combustion
B	Very low contribution to combustion
C	low contribution to combustion
D	Acceptable contribution to combustion
E	Acceptable flammability
F	No requirements

MOST IMPORTANT COMPONENTS

DOWEL



- To be applied 24 h after adhesive has dried.
- 2 – 4 pc/m² typically in Europe
- 10 pc/ m² as per Dubai Municipality requirements
- Fastening systems such as shot nails, screwed nails or expansion bolts.
- Minimum fastener penetration: 7cm for ALC block, 4cm for brick or concrete

NORMS AND REGULATIONS

- *The Insulation Requirement by Dubai Municipality (Administrative order No 77 in 2001)*

U value less 0.1 Btu/ °F.ft². h or 0,57 W/(m².K) for walls.

NORMS AND REGULATIONS

THE MOST IMPORTANT GUIDELINE ETAG 004



European Organization for Technical Approvals

ETAG 004

**Guideline for European Technical Approvals
for
External Insulation and Finish Systems**

STANDARDS AND NORMS

Tests	Standards	Test methods	Requirements
Guideline for EIFS approval	ETAG 004	Assessment of whole system	Yes
Tensile adhesive strength of adhesive and embedding mortars on polystyrene	ETAG 004	Adhesion test on polystyrene boards	> 0.08 N/mm ²
Crack test	Ö-Norm B 6110	Wedge test	No cracks up to 5 mm thickness
Drop test	EOTA, (concept) WACKER method	Steel ball falls on EIFS	Impact energy > 3 J
Flexural and compressive strength	DIN 18555/3	Prisms, 4 x 4 x 16 cm ³	No
Capillary water absorption	ETAG 004 EN ISO 15148	Water absorption of an embedding mortar and decorative topcoat on an insulation panel after 24h	< 0.5 kg/m ²

NEW EOTA RIG BETTER SERVICE FOR OUR CLIENTS

Two individual walls at the climate chamber tested at the same time
(appr. 24 tests/year)



Test wall preparation for
the hygro-thermal test

STANDARDS AND NORMS (EOTA WALL) (ETAG 004 5.1.3.2.1)

EOTA (ETAG 004 – WWW.EOTA.BE)

80 hygrothermal cycles	3 h 70 °C- 10 % humidity, 1 h rain at 15 °C, 2 h without exterior influence at 15 °C (Drainage)
------------------------	--

5 heat / freeze cycles	8 h 50 °C 16 h -20 °C
------------------------	--------------------------

Visuell inspection during and after the testprogram	Blisters, delamination, fine cracks, crawling,
---	--

Tests after finishing the cycles on the testwall

Adhesion on the base coat	> 0,08 N/mm ²
---------------------------	--------------------------

Impact resistance (steel ball test)	< 3 J, 3 – 10 J, > 10 J.
-------------------------------------	--------------------------

3 Categories

Perfortest	not specified
------------	---------------

Resistance against perforation of the system, if thickness of layer lower than 6 mm


RISING ENERGY CONSUMPTION, COSTS, GROWING URBANISATION, POPULATION AND ENERGY SHORTAGES RESULT IN GROWING PRESSURE TO USE ENERGY EFFICIENTLY

Figure 7. World Marketed Energy Consumption, 1970-2025



Sources: **History:** Energy Information Administration (EIA), *International Energy Annual 2002*, DOE/EIA-0219(2002) (Washington, DC, March 2004), web site www.eia.doe.gov/iea/. **Projections:** EIA, *System for the Analysis of Global Energy Markets* (2005).

Figure 8. World Marketed Energy Use by Region, 1970-2025

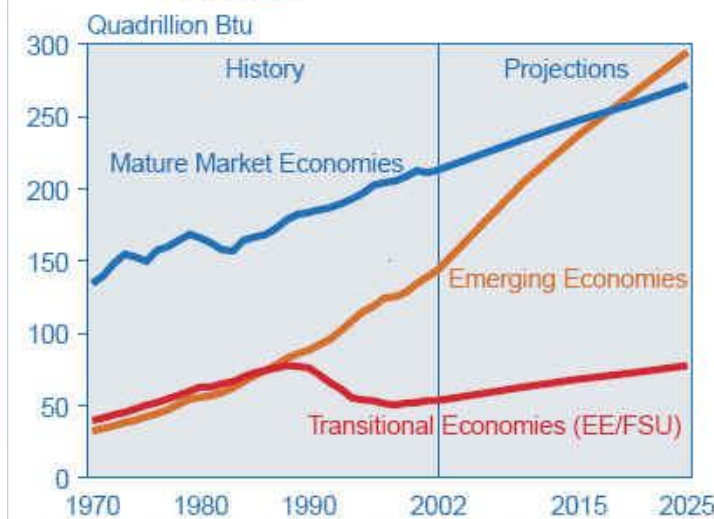

Sources: **History:** Energy Information Administration (EIA), *International Energy Annual 2002*, DOE/EIA-0219(2002) (Washington, DC, March 2004), web site www.eia.doe.gov/iea/. **Projections:** EIA, *System for the Analysis of Global Energy Markets* (2005).

Figure 20. Residential Sector Energy Consumption by Region, 2002-2025




Sources: **2002:** Energy Information Administration (EIA), *International Energy Annual 2002*, DOE/EIA-0219(2002) (Washington, DC, March 2004), web site www.eia.doe.gov/iea/. **Projections:** EIA, *System for the Analysis of Global Energy Markets* (2005).

Source: International Energy Outlook 2005, EIA

„Energy has become an important factor that holds back economic and social development“

Leading Group on Energy Development, June 2005 (Inter-Ministerial Group, China)

TESTING THE EFFECTS OF EIFS UNDER PRACTICAL CONDITIONS IN DIFFERENT CLIMATIC ZONES IN CHINA

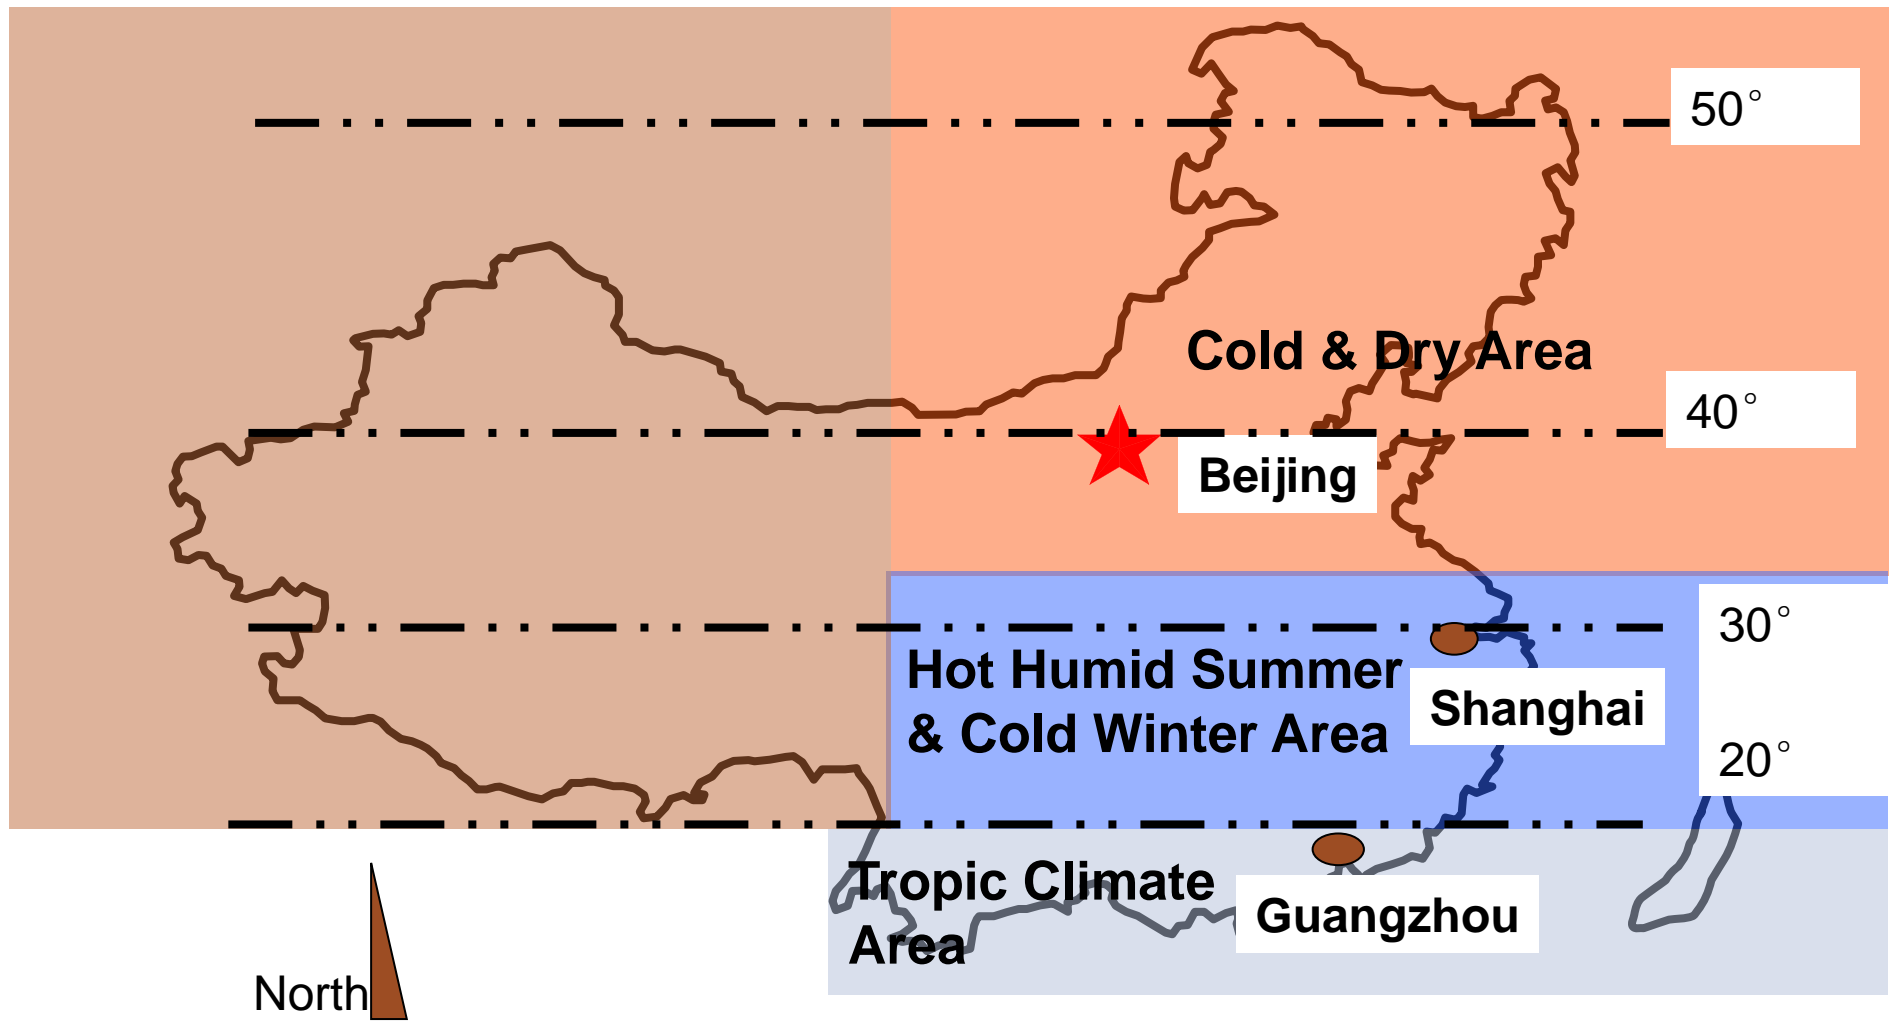

ONE YEAR MODEL HOUSE PROJECT WITH CHINESE UNIVERSITIES PROVES EFFECTIVENESS OF EXTERIOR INSULATION FINISHING SYSTEMS



Beijing
北京

North



Shanghai
上海

East



Guangzhou
广州

South

Aim

Prove effectiveness of EIFS to the Chinese building industry under the existing climatic conditions

Approach

- Two identical model houses – one with, one without EIFS – in Beijing, Shanghai, Guangzhou
- Cooperation with Customers to build houses
- Cooperation with the Universities Tsing Hua, Tongji and South China Science & Technology for data collection and interpretation
- Spreading message in seminars, media, to associations, government etc.

Time line

Oct. 2002 – Oct. 2003

SAMPLES HOUSES WITH AND WITHOUT EIFS





SAMPLES HOUSES WITH AND WITHOUT EIFS



SAMPLES HOUSES WITH AND WITHOUT EIFS




TEMPERATURE VARIATIONS INSIDE THE MODEL HOUSES WITH AND WITHOUT EIFS DURING THE COLD AND HOT SEASON IN CHINA

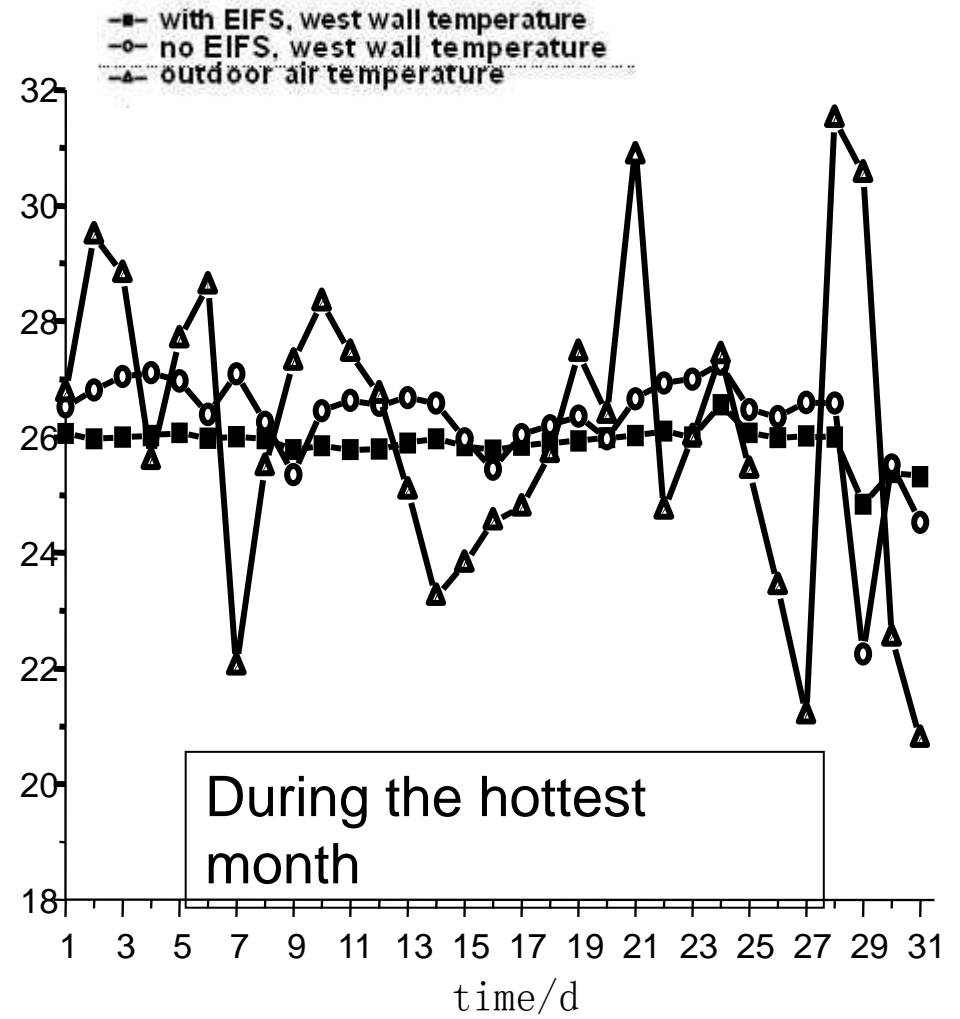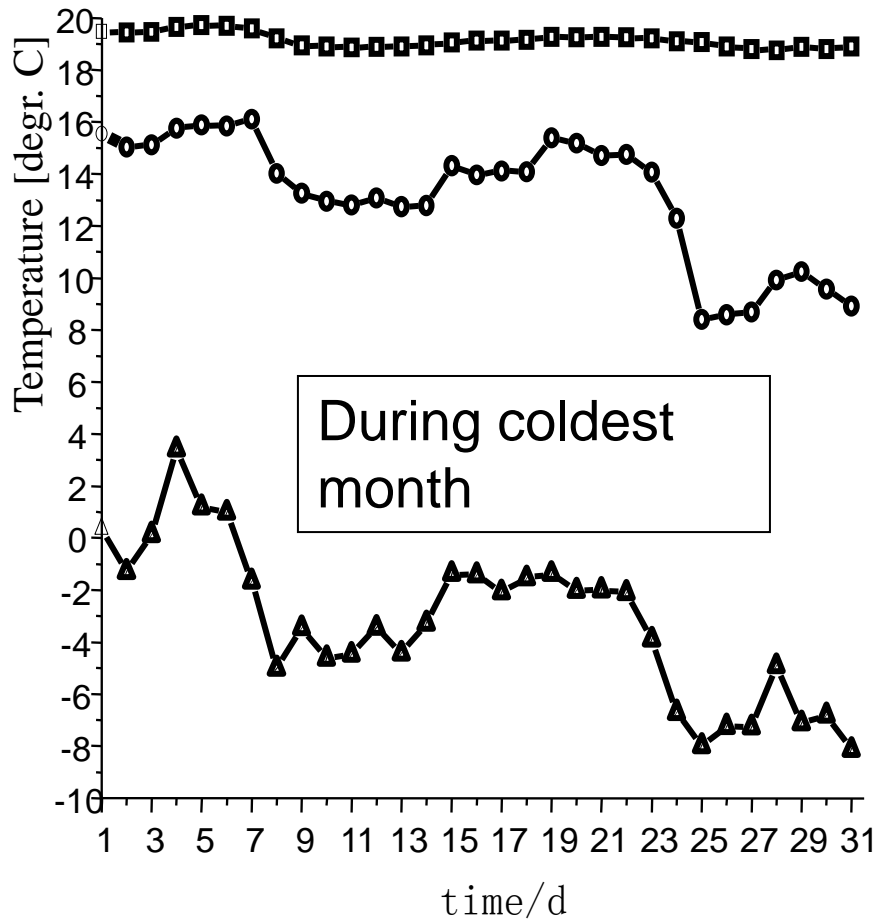

EIFS ACHIEVE CONSIDERABLE REDUCTION OF ENERGY USED TO HEAT AND COOL IN THREE DIFFERENT CLIMATIC ZONES

Average reduction of electricity consumption in %,
Oct. 2002- Oct. 2003

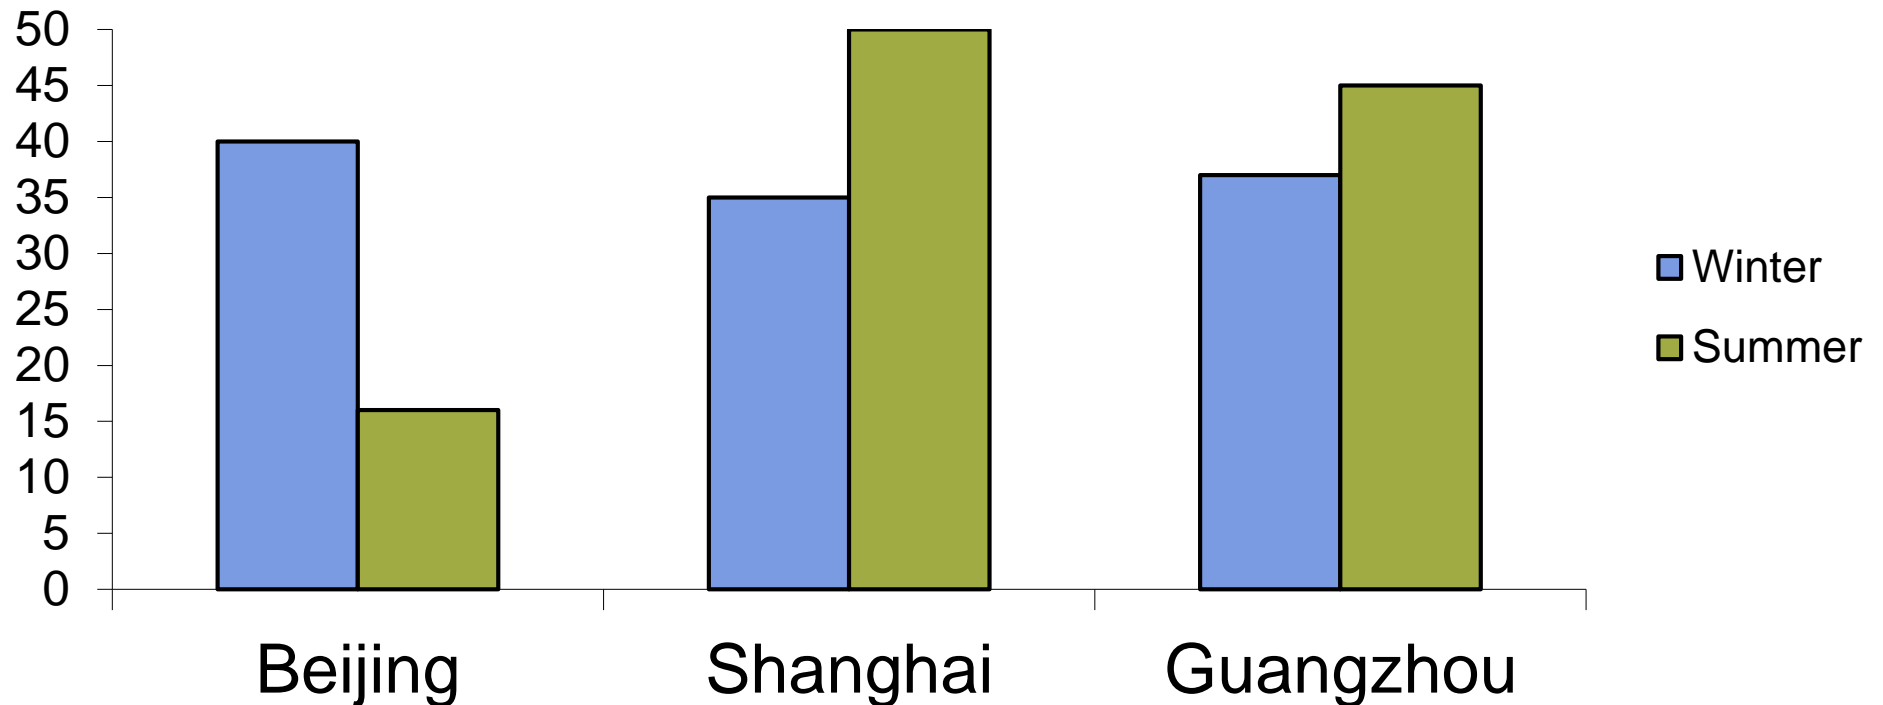

THANK YOU FOR YOUR ATTENTION